




SYSTEM 36

FOR TELESCOPIC CRANE AND CRAWLER CRANE

- SYSTEM 36 Automatic Safe Load Indicator
 offers all the advantages of the microprocessor
 technique in combination with reliability and
 versatility
- High reliability by use of fewer circuit boards
 with full line of up-grade options available
- Minimum on-site installation time
- Housing protection class IP56
- Continuous self-check of central circuit and all sensors
- Compact design
- High accuracy



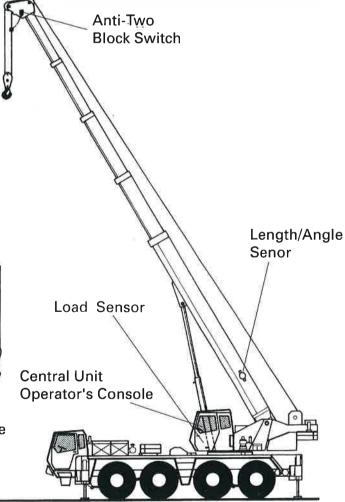

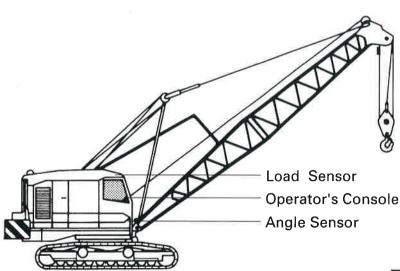

Sole Agent:









SYSTEM 606

A.S.L.I. SYSTEM FOR EXCAVATOR AND TOW TRUCK

Special design for excavator and tow truck when it is used as lifting appliance

- Minimum ON-SITE installation time
- High Accuracy
- Compact and Reliable
- Protection up to IP56
- Individual audio and visual signals for alarm and pre-alarm

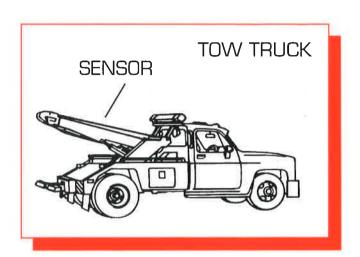

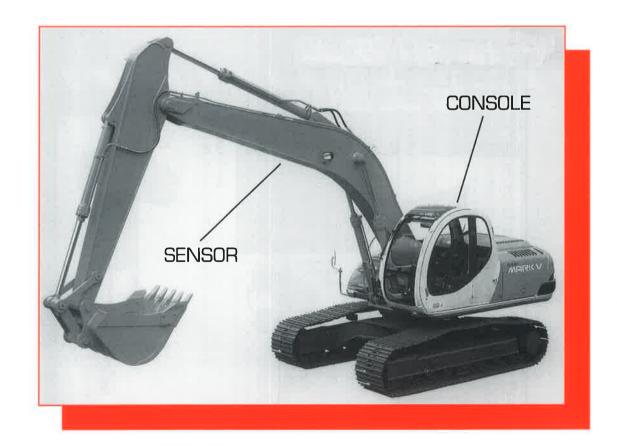



Sole Agent:




LINK ATTEMPT LTD.



SYSTEM 602

FOR AERIAL PLATFORM, ACCESS PLATFORM, GONDOLA AND HOIST.

- Minimum ON-SITE installation time
- Individual audio and visual signals for alarm and pre-alarm
- High Accuracy
- Compact and Reliable
- Protection up to IP56

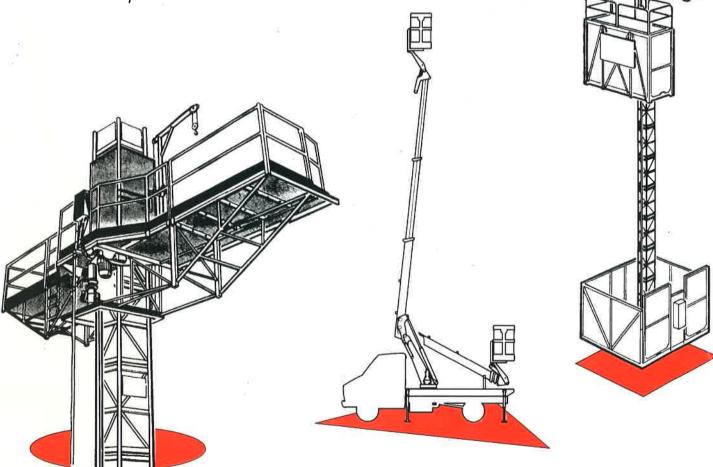



Sole Agent:



LINK ATTEMPT LTD.