

# Self-Propelled Scissor Lifts

## GS-2632

### Specifications

Models	GS-2632	
Measurements	US	Metric
Working height maximum*	32 ft	9.92 m
▲ Platform height maximum	26 ft	7.92 m
▲ Platform height stowed	3 ft 9.5 in	1.16 m
▲ Platform length - outside	7 ft 5 in	2.26 m
extended	10 ft 5 in	3.18 m
Slide-out platform extension deck	3 ft	0.91 m
▲ Platform width - outside	2 ft 8 in	0.81 m
Guardrail height: fixed rails	—	—
fold down rails (CE)	3 ft 7 in	1.10 m
Toeboard height	6 in	0.15 m
▲ Height - stowed	—	—
fixed rails	—	—
folding guardrails (CE)	7 ft 5 in	2.26 m
rails folded	6 ft 3 in	1.91 m
▲ Length - stowed	8 ft	2.44 m
Length - extended	10 ft 11 in	3.33 m
▲ Width	2 ft 8 in	0.81 m
▲ Wheelbase	6 ft 1 in	1.85 m
▲ Ground clearance - center	3.76 in	95 mm
▲ - with pothole guards deployed	0.75 in	0.02 m

### Productivity


Maximum platform occupancy**	2	2
Lift capacity	500 lbs	227 kg
Extension deck capacity	250 lbs	113 kg
Drive height	full height	
Drive speed - stowed	2.2 mph	3.5 km/h
Drive speed - raised	0.5 mph	0.8 km/h
Gradeability - stowed***	25%	
Maximum outrigger leveling:		
front to back	—	—
Maximum outrigger leveling:		
side to side	—	—
Turning radius - inside	zero	zero
Turning radius - outside	7 ft	2.13 m
Raise / lower speed	30 / 40 sec	30 / 40 sec
Controls/proportional	proportional	
Drive	dual front wheel	
Multiple disc brakes	dual rear wheel	
Tires - solid non-marking	15 x 5 x 11 in	38x13x28cm

### Power

Powersource	24 VDC (four 6V 225 Ah batteries)
Hydraulic system capacity	3.75 gal 14.2 L

### Weight\*\*\*\*

ANSI, CSA	4,413 lbs	2,002 kg
CE, AUS	4,313 lbs	1,956 kg

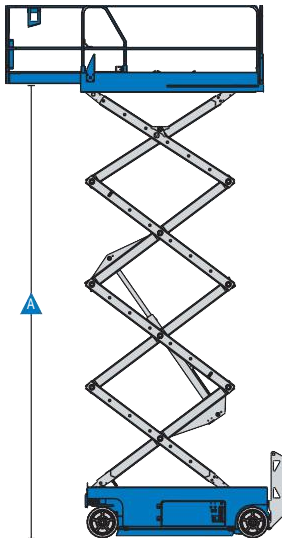

**Standards Compliance** ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* CE/AUS markets: GS-2632 and GS-3232 indoor use only. GS-2032 outdoor use-one person maximum occupancy.

\*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.

\*\*\*\* Weight will vary depending on options and/or country standards.