




nifty

Heightrider 12

The Nifty **Height Rider 12** is one of the most versatile and reliable machines in its class. It is specifically designed to give maximum reach performance from the lightest, most compact base possible. A telescopic upper boom gives improved accuracy when positioning the platform and superb manoeuvrability makes it ideal for a wide range of applications.

SAFETY FEATURES

- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Manual Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Dual Harness Points
- CE Mark

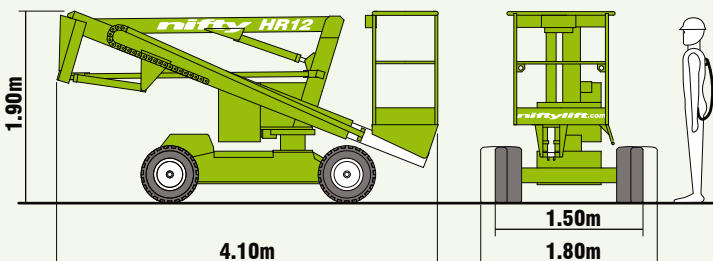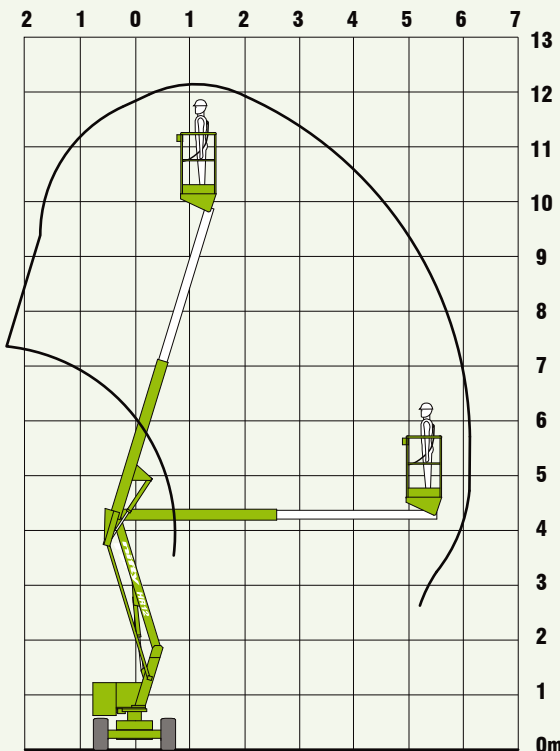

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



The **HR12's** Bi-Energy option allows it to work for extended periods inside and outside, making it the perfect all-rounder.

SPECIFICATIONS

Working Height	12.20m	40ft
Platform Height	10.20m	33ft 5in
Working Outreach	6.10m	20ft
Slew	360°	
Width - Standard	1.80m	5ft 11in
- Narrow	1.50m	4ft 11in
Height	1.90m	6ft 3in
Length	4.10m	13ft 5in
Minimum Weight - Standard	2,860kg*	6,310lbs*
- Narrow	3,100kg*	6,830lbs*
Turning Radius - Outside	4.20m	13ft 9in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 7in x 2ft 2in
Drive Speed	2.1mph	3.4 kph
Gradeability	25% (14°)	
Control System	Fully Proportional Hydraulic	
Power Options	Battery Only	
	Petrol, Diesel or LPG Only	
	Bi-Energy (Engine & Battery)	

* Weights may vary according to specification, please confirm before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England
www.niftylift.com
e.mail: info@niftylift.com
Tel.: +44 (0)1908 223456
Fax.: +44 (0)1908 312733

