

JCPT(HD)

Self-Propelled Scissor Lifts (Hydraulic Motor Drive)



JCPT1008HD



S.W.L	230kg
S.W.L On Extension	113kg
Max.Occupants	2



A Max.Working Height	10.00m
B Max.Platform Floor Height	8.00m



C Overall Length	2.48m
D Overall Width	0.81m
Overall Height(Rails Up)	2.36m
E Overall Height(Rails Down)	2.00m
Platform Size(Length/Width F)	2.27m×0.81m
G Platform Extension Size	0.90m
Ground Clearance(Stowed)	0.10m
Ground Clearance(Raised)	0.019m
Wheelbase	1.87m
Turning Radius(Inside/Outside)	0m/2.10m



Drive/Lifting Motor	24V/3.3kW
---------------------	-----------



Travel Speed(Stowed)	3.5km/h
Travel Speed(Raised)	0.8km/h
Up/Down Speed	28/40sec



Gradeability	25%
Max.Working Slope(CE)	1.5°/3°
Max.Working Slope(ANSI)	2°/3°



Batteries	4×6V/225Ah
Integrated Charger	24V/25A



Tyres	Φ381×127mm
-------	------------




Weight(CE)	2140kg
Weight(ANSI)	2140kg

Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Drivable At Full Height
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

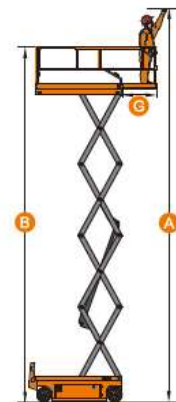

Folding Guardrails



Compact Turning Radius



Swing Out Tray



Gradeability