

产品特性

PRODUCT CHARACTERS

让工作更轻松 更安全

- 装有水平校准装置——通过调节丝杆高度调整设备水平。
It have horizotal calibration device——It can adjust equipment horizotal by adjust the outer support leg height.
- 特强桅柱系统——确保机器有超强的负重能力和稳定性。
Special strong masts system——Can make sure the machine have the strongest carry capacity and steady.
- 气阻式防钢丝绳断裂装置——确保设备安全。
Air-resistor style prevent wirerope cracked device——Make sure the equipment safety.
- 气力推升装置精密滑动系统——使操作者通过手动操作就可轻松自如地达到使用高度。
Air-feed device,precise slither system——Let operator reach the work height easily by manual.
- 设备安全稳定可靠，使用方便。重量轻，载重能力强，性价比高。
This equipment safety,steady,and convenience to use.It is light,strong carry capacity,and high cost performance.


型号规格与技术参数

SPECIFICATIONS AND TECHNICAL PARAMETERS

型号 Code	LA 32
工作高度 Work height	5.30m
平台高度 Y Platform height	3.30m
载重能力 Carry capacity	120kg
护栏高度(米) h Guardrail height(m)	1.00m
收藏长度(L) Storage length (L)	1.15m
收藏宽度(W) Storage width (w)	0.76m
收藏高度(H) Storage height (H)	2.00m
平台尺寸(长*宽) a*b Platform size(a*b)	0.70m x 0.62m
支腿展开尺寸(A*B) Supporting leg size(A*B)	1.50m x 1.37m
平台离墙间距(G) Distance between platform and wall(G)	0.30m
整机重量 Machine weight	160k g

外形及安装尺寸

OUTLINE AND MOUNTING DIMENSIONS

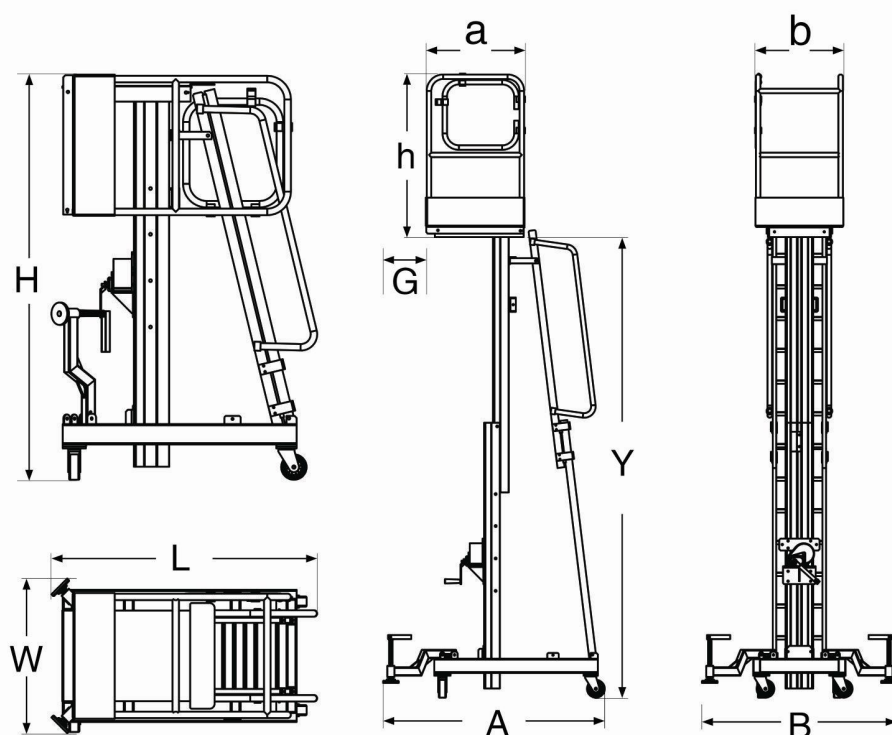

※ 工厂保留对用料和技术参数的修改权,请在下单前确认。

Plant materials and technical parameters to retain the right of revision, please confirm before place an order.



我公司生产的所有产品，为确保客户利益，已投保中国平安财产保险股份有限公司的产品责任险，以保证客户使用我产品全无后顾之忧。
We Covered Product Liability Insurance From Ping An Insurance For All Of Our Products .you Will Use Them In Safe With No Worry.